

●Part Number Guide

T-FF.FFFK-LC-FT-OT-ESR-TR-S

T(Type 型号): H=2.5×7 Tuning Fork(SMD)

F(Frequency 标称频率)

LC(Load Capacitance 负载电容):12.5=12.5pf 00=series, etc

FT(Frequency Tolerance 调整频差):50=±50ppm, etc

OT(Operating Temperature 工作温度):1060=-10℃ to +60℃ 4085=-40℃ to +85℃, etc

ESR(Equivalent Series Resistance 等效阻抗)

TR(Tape and Reel 编带)

S(Special Requirement 特殊要求)






●Electrical Specifications 电气参数


型号	Holder Type	MC-156
频率范围	Frequency Range	32.000KHz to100.00KHz
频率温度系数	Parabolic curvature constasnt	$-0.04 \times 10^{-6} / ^\circ\text{C}^2 \text{Max}$
频率公差	Frequency Tolerance (f_tol)	$\pm 50 \times 10^{-6}$
拐点温度	Inflection point temperature (Ti)	+25℃±5℃
工作温度范围	Operating Temperature Range	-40℃~+85℃
储存温度范围	Storage Temperature Range	-55℃~+125℃
老化	Aging (25℃)	$\pm 5 \times 10^{-6} / \text{Year Max}$
串联电容	Series Capacitance (C1)	2.5fF~0.6fF
分路电容	Shunt Capacitance (C0)	1.2pF ~0.5pF
激励功率	Drive Level	1.0μWMax
串联电阻(ESR)	Series Resistance (R1)	65K Ω ~25K Ω
负载电容	Load Capacitance (CL)	7 pF,9pF,12.5 pF

• Mechanical Dimensions外型尺寸

UNIT<单位>:mm(毫米)

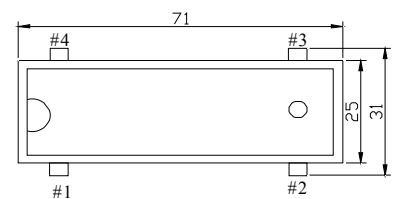

推荐焊盘尺寸



●Equivalent Series Resistance and Mode of Operation

等效阻抗和振荡模式

Frequency Range 频率范围	ESR (Ω) 等效阻抗	Mode 振荡模式
30.000-40.000 KHz	40 Max	Fundamental
40.000-60.000 KHz	30 Max	Fundamental
60.000-70.000 KHz	25 Max	Fundamental
70.000-100.00 MHz	22Max	Fundamental

• Reflow Condition 回流焊条件

